


Installation Instructions: K-Quick Clamp Skirting System

Kinder Australia Product:	K-Quick Clamp Skirting System
Product Category:	Conveyor Skirting & Sealing
Issue Date:	22.05.2013
Revision:	1

Overview:

The function of the K-Quick Clamp Skirting System is used to retain and easily adjust skirting seal. The skirting seal is clamped between the chute inner plate (not supplied) and 1000 mm long angle clamping bar. The system allows operators to adjust skirting seal without the need of tools.

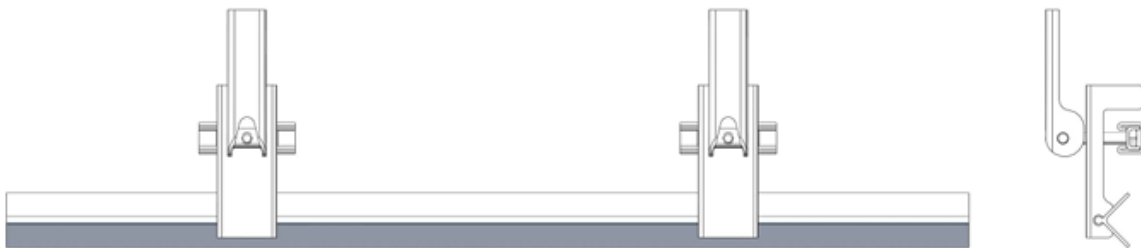

Procedure:

1. Isolate, lock and danger tag the conveyor at the main positive isolator in accordance with the appropriate health and safety regulations in forces at your works to prevent unauthorized starting.
2. Ensure that the complete system contains two sections of uni-strut, two clamps and one clamp angle.
3. Assemble and fix the system as shown in Figure 1 & 2, with the clamps positioned at 500mm pitch.
4. Adjust the clamps to suit the skirting seal thickness. The clamps are free to release in any position.
5. Remove all tools and equipment.
6. Replace guards.
7. Remove personnel danger tags. Unlock main positive isolator and close. Start belt on test or manual control.
8. Return conveyor to service and observe performance.

Installation Instructions: K-Quick Clamp Skirting System

Figure 1

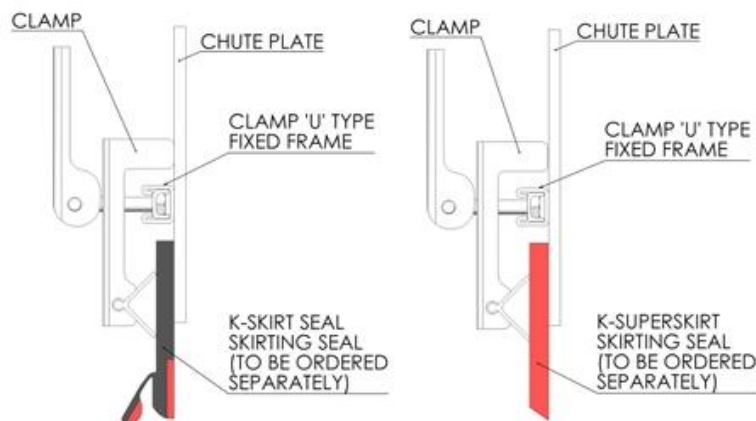


Figure 2

