
K-Containment® Seal: Polyurethane & Ceramic Composite Options


Lighter, yet more Durable Inner Seal

The critical component in any conveyor transfer point is an effective sealing system. The seal should be located where the material is being loaded and continue to where it becomes stable.

This is the last position to practically control spillage and dust. To enhance the success of the outer seal or skirting, the loading area should be properly supported.

K-Containment® Seal is a high performance, low friction engineered polyurethane system offering exceptional resistance to wear. The slotted arrangement allows for installation adjustment, ensuring that material cannot be entrapped leading to premature belt damage. In many cases the outer flexible seal is ineffective in controlling spillage as an unsupported belt trying to contain the full weight of material load would be inadequate.

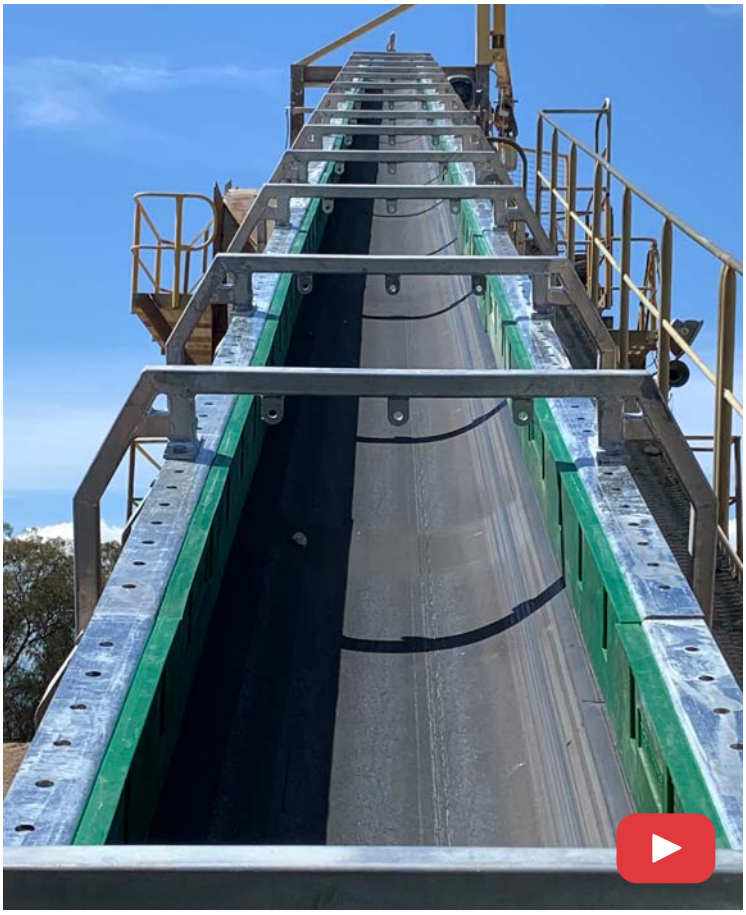

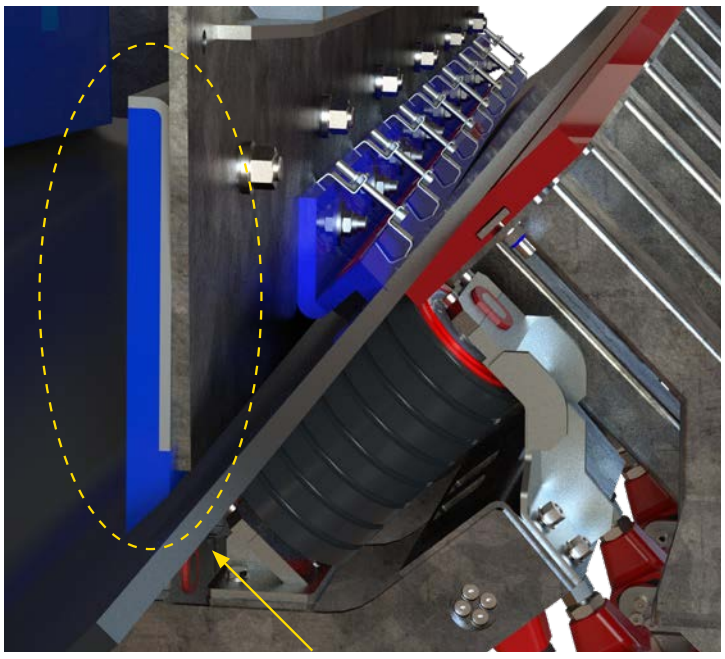

K-Containment® Seal PU solid polyurethane, metric version shown.



Instead, to effectively contain bulk material K-Containment® Seal should be installed inside the chute to handle high internal chute pressure and therefore reduce the load on the skirting seal. The steel-backed polyurethane seal can be supplied bevelled or straight edged.

Kinder Australia Pty Ltd

ABN 28 006 489 238
P: +61 3 8587 9111 | F: +61 3 8587 9101
conveyorsolutions@kinder.com.au
kinder.com.au


KINDER™ EXPERIENCE INNOVATION PRODUCTIVITY

40 YEARS OF INNOVATION


© 2025 Kinder Australia Pty Ltd

K-Containment® Seal: Polyurethane & Ceramic Composite Options


PU — solid polyurethane

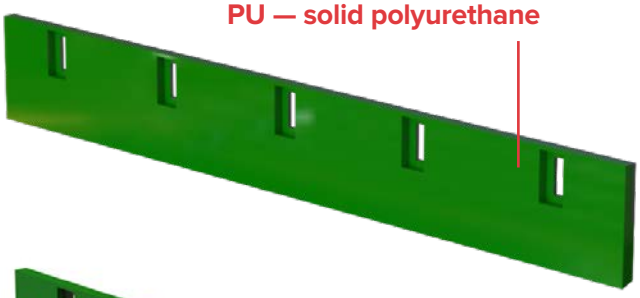


PU — solid polyurethane, metric version suits AirScrape® or where a 2m seal is required.

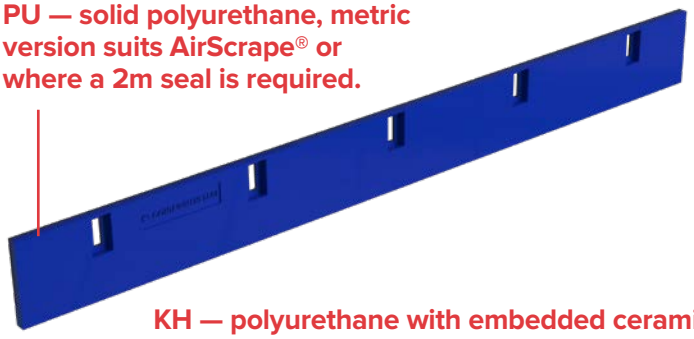

KT — polyurethane with embedded ceramic hexagon beads. 25mm thick only. Various height and length. Used for sliding abrasion.

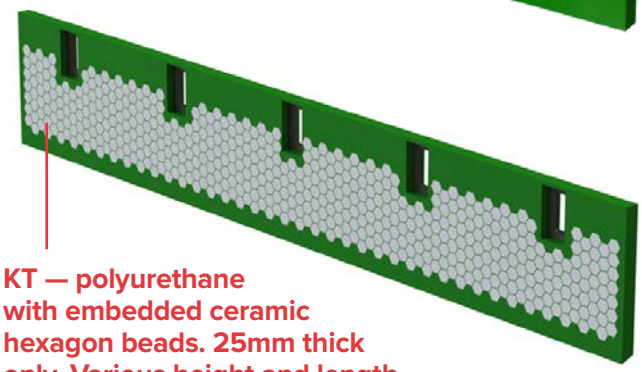

KH — polyurethane with embedded ceramic cube beads. 50mm thick only. Various height and length. Used for high impact and sliding abrasion. Used for sliding abrasion.

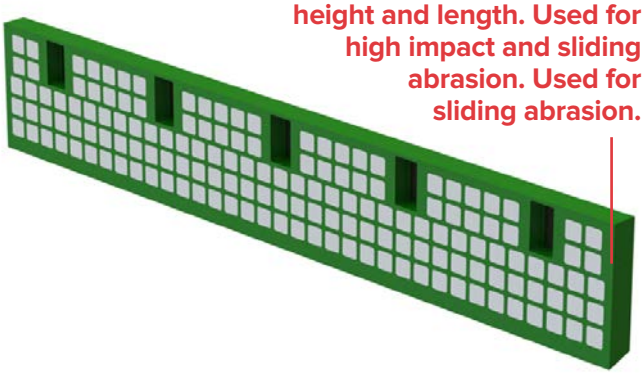

Type	Description	Dimensions Thickness (mm)	Dimensions Height x Length (mm)	Centre Slot Pitch	Kinder Part Number	Bevel
PU	Solid PU / Metric Version Suits AirScrape® or where a 2m seal is required	25	25 x 200 x 2000	400	K-FAW-CP-CL-LM-2020000-U83	0°
			25 x 200 x 2000		K-FAW-CP-CL-LM-2020002-U83	20°
			25 x 200 x 2000		K-FAW-CP-CL-LM-2020003-U83	35°
			25 x 200 x 2000		K-FAW-CP-CL-LM-2020004-U83	45°
			25 x 250 x 2000		K-FAW-CP-CL-LM-2520000-U83	0°
			25 x 250 x 2000		K-FAW-CP-CL-LM-2520002-U83	20°
			25 x 250 x 2000		K-FAW-CP-CL-LM-2520003-U83	35°
			25 x 250 x 2000		K-FAW-CP-CL-LM-2520004-U83	45°
		50	50 x 200 x 2000		K-FAW-CP-CL-TM-2020000-U83	0°
			50 x 200 x 2000		K-FAW-CP-CL-TM-2020002-U83	20°
			50 x 200 x 2000		K-FAW-CP-CL-TM-2020003-U83	35°
			50 x 200 x 2000		K-FAW-CP-CL-TM-2020004-U83	45°
			50 x 250 x 2000		K-FAW-CP-CL-TM-2520000-U83	0°
			50 x 250 x 2000		K-FAW-CP-CL-TM-2520002-U83	20°
			50 x 250 x 2000		K-FAW-CP-CL-TM-2520003-U83	35°
			50 x 250 x 2000		K-FAW-CP-CL-TM-2520004-U83	45°

Kinder Australia Pty Ltd

ABN 28 006 489 238
P: +61 3 8587 9111 | F: +61 3 8587 9101
conveyorsolutions@kinder.com.au
kinder.com.au

KINDER™ EXPERIENCE INNOVATION PRODUCTIVITY

40 YEARS OF INNOVATION

© 2025 Kinder Australia Pty Ltd

K-Containment® Seal: Polyurethane & Ceramic Composite Options

Type	Description	Dimensions Thickness (mm)	Dimensions Height x Length (mm)	Centre Slot Pitch	Kinder Part Number	Bevel
PU	Solid PU/Steel Backed	25	203 x 1524	305	K-FAW-CP-CL-L8600-G83	0°
			204 x 1524		K-FAW-CP-CL-L8602-G83	20°
			205 x 1524		K-FAW-CP-CL-L8603-G83	35°
			206 x 1524		K-FAW-CP-CL-L8604-G83	45°
		50	150 x 1524		K-FAW-CP-CL-T6600-G83	0°
			151 x 1524		K-FAW-CP-CL-T6602-G83	20°
			152 x 1524		K-FAW-CP-CL-T6603-G83	35°
			153 x 1524		K-FAW-CP-CL-T6604-G83	45°
		50	203 x 1524		K-FAW-CP-CL-T8600-G83	0°
			203 x 1524		K-FAW-CP-CL-T8602-G83	20°
			203 x 1524		K-FAW-CP-CL-T8603-G83	35°
			203 x 1524		K-FAW-CP-CL-T8604-G83	45°
		25	203 x 2438	533	K-FAW-CP-CL-L8960-G83	0°
			203 x 2438		K-FAW-CP-CL-L8962-G83	20°
			203 x 2438		K-FAW-CP-CL-L8963-G83	35°
			203 x 2438		K-FAW-CP-CL-L8964-G83	45°
			254 x 2438		K-FAW-CP-CL-L10960-G83	0°
			254 x 2438		K-FAW-CP-CL-L10962-G83	20°
			254 x 2438		K-FAW-CP-CL-L10963-G83	35°
			254 x 2438		K-FAW-CP-CL-L10964-G83	45°
			304 x 2438		K-FAW-CP-CL-L12960-G83	0°
			304 x 2438		K-FAW-CP-CL-L12962-G83	20°
			304 x 2438		K-FAW-CP-CL-L12963-G83	35°
			304 x 2438		K-FAW-CP-CL-L12964-G83	45°
		50	203 x 2438		K-FAW-CP-CL-T8960-G83	0°
			203 x 2438		K-FAW-CP-CL-T8962-G83	20°
			203 x 2438		K-FAW-CP-CL-T8963-G83	35°
			203 x 2438		K-FAW-CP-CL-T8964-G83	45°
			254 x 2438		K-FAW-CP-CL-T10960-G83	0°
			254 x 2438		K-FAW-CP-CL-T10962-G83	20°
			254 x 2438		K-FAW-CP-CL-T10963-G83	35°
			254 x 2438		K-FAW-CP-CL-T10964-G83	45°
			304 x 2438		K-FAW-CP-CL-T12960-G83	0°
			304 x 2438		K-FAW-CP-CL-T12962-G83	20°
			304 x 2438		K-FAW-CP-CL-T12963-G83	35°
			304 x 2438		K-FAW-CP-CL-T12964-G83	45°

Type	Description	Dimensions Thickness (mm)	Dimensions H x W (mm)	Centre Sloth Pitch	Bevel	Part Number
KH	Polyurethane / Ceramic Cube Beads / Steel Backed	50	Various			Contact Kinder Australia
KT	Polyurethane / Ceramic Hexagon Beads / Steel Backed	25	Various			Contact Kinder Australia

Description	Part Number
K-Containment Seal - Snap Plug Kit Assembly G83 Includes: 1x Snap Plug (K-FAW-CL-SNAP-PLUG-G83) 1x M16x50 Cup Head SQ. Neck Bolt, Nut, M16 Washer & Overside Washer (K-FAS-CBOLT-M16x50) Chute Wall Thickness Limit 20mm (Maximum)	K-FAW-CL-SNAP-PLUG-AS

Kinder Australia Pty Ltd

ABN 28 006 489 238
P: +61 3 8587 9111 | F: +61 3 8587 9101
conveyorsolutions@kinder.com.au
kinder.com.au

KINDER™ EXPERIENCE INNOVATION PRODUCTIVITY

40 YEARS OF INNOVATION

© 2025 Kinder Australia Pty Ltd