

K-Deblinding Rods



Kinder Australia's **K-Deblinding Rods** are elastic polyurethane rods that are fixed to the screen. They use the machine's vibration to move and bounce on the surface of the mesh, avoiding particles wedging and blinding the screen.

Screen Width	Components
Up to 1000	1 K-Deblinding Rod
1000 ÷ 1500	2 K-Deblinding Rods
1500 ÷ 2000	3 K-Deblinding Rods

Note: To avoid tangling of separate **K-Deblinding Rods**, they are joined using separators, according to the number of mobile rods.

This product is not recommended for use with wire mesh that has a diameter smaller than 2.5mm and is not suitable for use on rubber screens.

Screen Length	Components
Up to 1500	1 Fixed rod and 2 mobile rods
Up to 2000	1 Fixed rod and 3 mobile rods
Up to 2500	1 Fixed rod and 4 mobile rods
Up to 3000	1 Fixed rod and 5 mobile rods
Up to 3500	1 Fixed rod and 6 mobile rods
Up to 4000	1 Fixed rod and 7 mobile rods
Up to 4500	1 Fixed rod and 8 mobile rods



https://kinder.com.au


Subject to © Kinder Australia Pty Ltd Issue: 202101

Kinder Australia Pty Ltd

26 Canterbury Road, Braeside VIC 3195 PO Box 1026, Braeside VIC 3195


≅ +61 3 8587 9111 **≘** +61 3 8587 9101

⁴ conveyorsolutions@kinder.com.au ABN: 28 006 489 238





K-Deblinding Rods

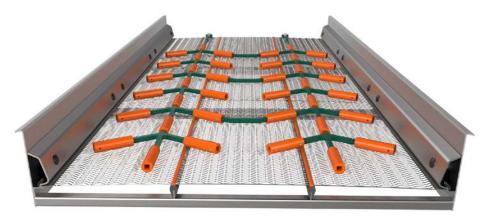

Components



Fixture



Fixed Rod

- 1 PU Arm
- 1 PU Cylinder
- 1 Pin



Mobile Rod

- 1PU 3-way Arm
- 3 PU Cylinder
- 4 Pin



Separator

- 1 PU Arm
- 2 Pins

Separator Lengths:

- 135mm
- 400mm



https://kinder.com.au

Subject to © Kinder Australia Pty Ltd Issue: 202101

Kinder Australia Pty Ltd

26 Canterbury Road, Braeside VIC 3195 PO Box 1026, Braeside VIC 3195

≅ +61 3 8587 9111 **≘** +61 3 8587 9101

⁴ conveyorsolutions@kinder.com.au ABN: 28 006 489 238

