


Datasheet - Belt Alignment Switch Extreme - ZS 92 SR

ZS 92 SR 22 P -40°C ... +85°C IP66/67 Extreme Material no.: 1452080

Product features

- Temperature resistant from -40 °C to +85 °C
- High degree of protection IP66 / IP67
- Corrosion-resistant aluminium enclosure
- Screws and belt-alignment roller made of stainless steel
- With staggered contacts, adjustable from 5° to 35°
- Belt alignment lever adjustable in 12° steps using a self-locking mechanism
- Back and base mounting possible

Dimensions

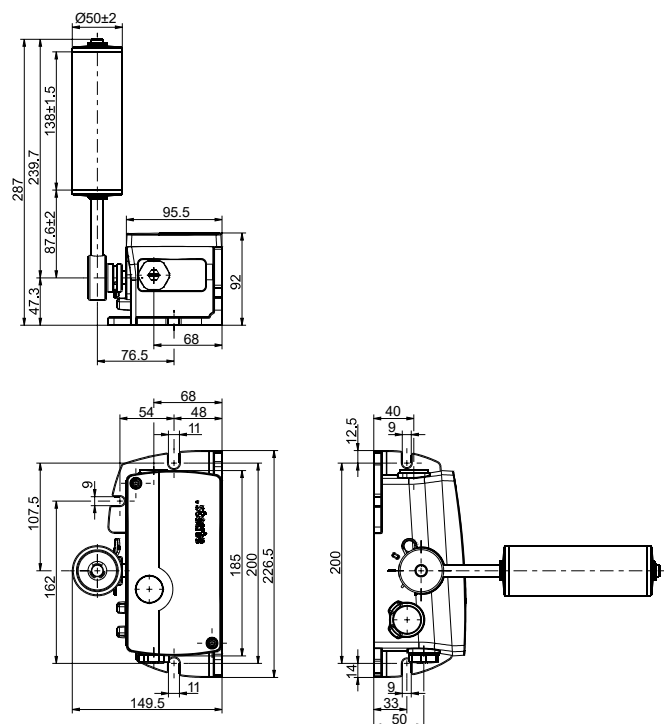

Technical data

Applied standards
EN 60947-5-1

Enclosure
aluminium die-cast, corrosion-resistant, powder-coated,
passivated, shockproof, anthracite grey, similar to RAL 7016

Cover
aluminium die-cast, corrosion-resistant, powder-coated,
passivated, shockproof, signal yellow, similar to RAL 1003

Tightening torque
cover screws: max. 2.5 Nm

Degree of protection
IP66/IP67 (IEC/EN 60529)

B10d (10 % load)
2 million

T_M
max. 20 years

Contact material
silver

Switching elements
2 NC/2 NO contacts, type Zb

Switching system
snap action, positive break NC contacts $\ominus$

Switching points
adjustable 5° to 35°; pre-adjustment setting 2 x 10°

Connection
screw connection terminals

Cable cross-section
max. 2.5 mm² (incl. conductor ferrules)

Cable entry
2 x M25 x 1.5

Rated impulse withstand voltage U_{imp}
6 kV

Rated insulation voltage U_i
400 V

Conventional thermal current I_{the}
4 A

Conditional short-circuit current
1100 A

Datasheet - Belt Alignment Switch Extreme - ZS 92 SR

ZS 92 SR 22 P -40°C ... +85°C IP66/67 Extreme Material no.: 1452080

Technical data (contd.)

Rated operating current/voltage I_e/U_e
4 A/400 VAC; 0.25 A/250 VDC; 0.55 A/125 VDC; 2.5 A/48 VDC; 3 A/24 VDC

Utilisation category
AC-15; DC-13

Short-circuit protection
4 A gG/gN fuse

Mechanical life
> 1 000 000 operations at max. 45° operating angle

Admissible belt speed
7 m/s for 3 h with a force of 50 N

Operation cycles
max. 600/h

Ambient temperature
-40 °C ... +85 °C


Degree of pollution
3

Approvals




Weight
2280 g

Contact diagram

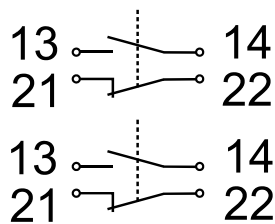

Switching diagram

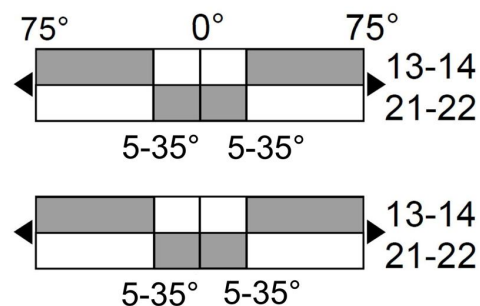

Switching points

