K-Shield Dynamax® Impact Belt Support System



Engineered to Endure the Harshest Mining and Bulk Materials

<u>K-Shield Dynamax® Impact Belt Support System</u> improves material containment at the conveyor's transfer point in very high impact applications.

Repeated impact from heavy lumps, long drop heights or lumps with sharp edges can potentially cause damage to the belt top cover. The centre of the K-Shield Dynamax® Impact Bed is suspended on anti-vibration mounts which significantly reduces the risk of belt damage. The K-Shield Dynamax® Impact Belt Support System features energy absorbing properties that can effectively reduce the full force of the material stream compared to Impact Idlers or a conventional impact cradle.

The belt is supported on low friction, 30mm thick UHMWPE rails. Statically mounted wings provide a sag free region allowing an effective seal between the conveyor skirting system and belt.

The K-Shield Dynamax® Impact Belt Support System also delivers a simple drop-in replacement for existing impact idlers.

Key Design Features

- Engineered to suit all bulk materials handling applications, particularly extreme mining environments.
- No rotating parts.
- Modular design.
- Energy absorbing mounts in impact zone.
- Fixed wings for effective skirting.
- Low friction UHMWPE Slider rails, antistatic option also available.
- Available in all belt widths.




Kinder Australia Pty Ltd ABN 28 006 489 238

P: +61 3 8587 9111 | F: +61 3 8587 9101 conveyorsolutions@kinder.com.au kinder.com.au





K-Shield Dynamax® Impact Belt Support System

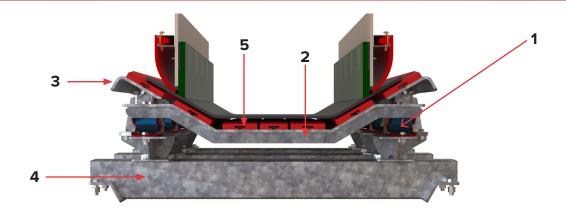


K-Shield Dynamax® Impact Belt Support System

- 1. Energy absorbing anti-vibration mounts.
- 2. Dynamic trough suspended on anti-vibration mounts.
- 3. Fixed wings for effective skirting.
- 4. Heavy duty transoms.
- 5. Low friction UHMWPE or K-Glideshield® Slider Rails.



XHD Model Shown



With K-Glideshield® High Speed/Capacity Centre Rails Shown

High Capacity / Speed Belt Option

Designed to improve material containment at the conveyor's transfer point in ultra-heavy duty, very high impact applications.

Repeated impact from heavy lumps, long drop heights or lumps with sharp edges can potentially cause damage to the belt top cover.

K-Shield Dynamax® Impact Belt Support features a solid steel structure and manufactured with proprietary **K-Glideshield High Speed / Capacity Impact Bars**, suitable for the most demanding mining and high-speed applications.







